


STANDARD FEATURES

Ramguard Rubber Wheel Stops serve as physical barriers to prevent vehicles from encroaching from their designated space. Heavy duty and built to last. For permanent surface mount installation onto concrete or bitumen.

- Moulded rubber compound
- Reflective yellow chevron markings
- 1650(L)mm x 100(H)mm x 159(W)mm at base
- 16kg
- -55c cold resistance
- 55c heat resistance
- 1.3 - /cm³ density
- A80 – 82 hardness
- 5-6.1 MPa tensile strength
- 3 x 20Ø recessed fixing points
- 37% minimum impact elasticity

OVERVIEW

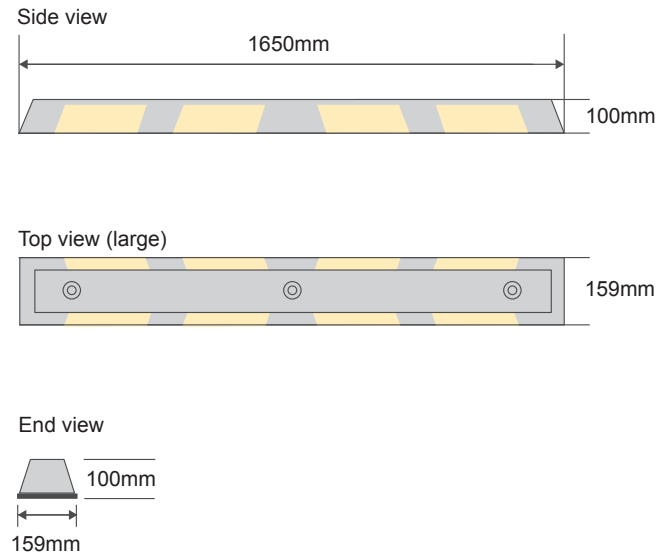

(Ratio 1-20)

MANUFACTURED TO THE FOLLOWING AUSTRALIAN STANDARDS

- AS 2890.1:2004 – Parking facilities – Off Street car parking

METALWORKS PERTH

U4, 29 Munt Street, Bayswater

P: +61 (8) 9353 4392

E: info@ramguardbollards.com.au

