

## STANDARD FEATURES







Ramguard Concrete Wheel Stops serve as physical barriers to prevent vehicles from encroaching from their designated space. For permanent surface mount installation onto concrete or bitumen. Available in 3 sizes.

- 40MPA concrete with N12 reinforcement bar
- Gully centred on underside for drainage and trolley lift
- 3 x 20Ø recessed fixing points

## STANDARD SELECTION (TICK ☒ / COMPLETE AS REQUIRED)

- ☐ 1650(L)mm x 100(H)mm x 160(W)mm
- ☐ 1950(L)mm x 100(H)mm x 160(W)mm
- ☐ 2400(L)mm x 160(H)mm x 200(W)mm

## OVERVIEW

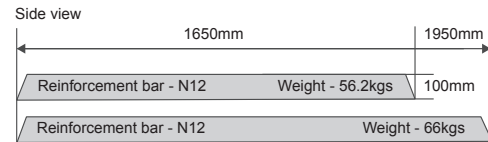

(Ratio 1-20)

## MANUFACTURED TO THE FOLLOWING AUSTRALIAN STANDARDS

- AS 2890.1:2004 – Parking facilities – Off Street car parking

## METALWORKS PERTH

U4, 29 Munt Street, Bayswater

P: +61 (8) 9353 4392

E: [info@ramguardbollards.com.au](mailto:info@ramguardbollards.com.au)

