

STANDARD FEATURES

Ramguard R7 Removable Padlockable Bollards are removable to quickly allow access. The bollard sits in an in ground sleeve and locks into place with a padlock. Once unlocked, the bollard lifts away with a lift handle. With the bollard removed, the sleeve padlock catch folds down to cover the sleeve hole. Easy installation with minimal groundwork. Ideal for shallow ground excavation. WA made and in stock.

- Corrosion resistant galvanised steel with a tough powder coated finish
- 50mm red reflective tape CL1
- 300mm sleeve

BOLLARD STANDARD SELECTION (TICK ☒ AS REQUIRED):

- ☐ R7-100OD (100ØDx4WTmm x800mm above ground)
- ☐ RP-140OD (140ØD x 5WTmm 800mm above ground)
- ☐ R7-100OD (100ØDx4WTmm 1200mm above ground)
- ☐ RP-140OD (140ØD x 5WTmm 1200mm above ground)
- ☐ Optional Bollard Storage Stand


FINISH

- ☐ Yellow
- ☐ White
- ☐ Stainless Steel
- ☐ Galvanised

CUSTOM R7 DETAILS

- ☐ Height _____ mm
- ☐ Wall thickness (WT)
- ☐ Colour
- ☐ Reflective colour _____
- ☐ Reflective size _____ Quantity (# stripes) _____

OVERVIEW

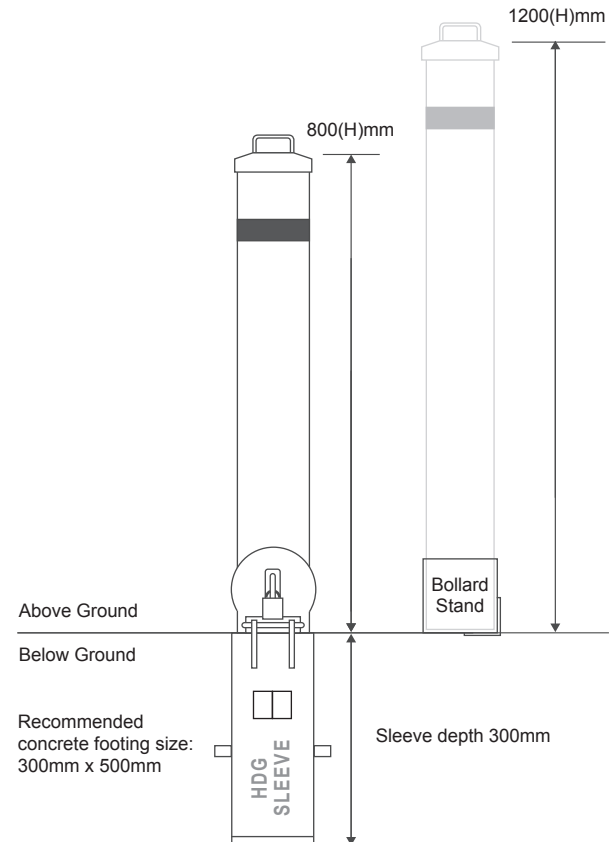

OPERATIONAL FEATURES



(Ratio 1-20)

MANUFACTURED IN WA TO THE FOLLOWING AUSTRALIAN STANDARDS:

- AS 1554.1 Structural Steel Welding
- AS 1163 & 1074 Grade C250, Structural Steel Hollow Section
- AS 1450 Steel Tube & AS4792 HDG Coating
- AS 4506-2005 & AS3754-1990 Powder Coating
- AS 4680:2006 – Hot Dip Galvanized (zinc) coatings on fabricated ferrous
- AS 1627.4-2005 Abrasive Blasting

METALWORKS PERTH

U4, 29 Munt Street, Bayswater

P: +61 (8) 9353 4392

E: info@ramguardbollards.com.au

